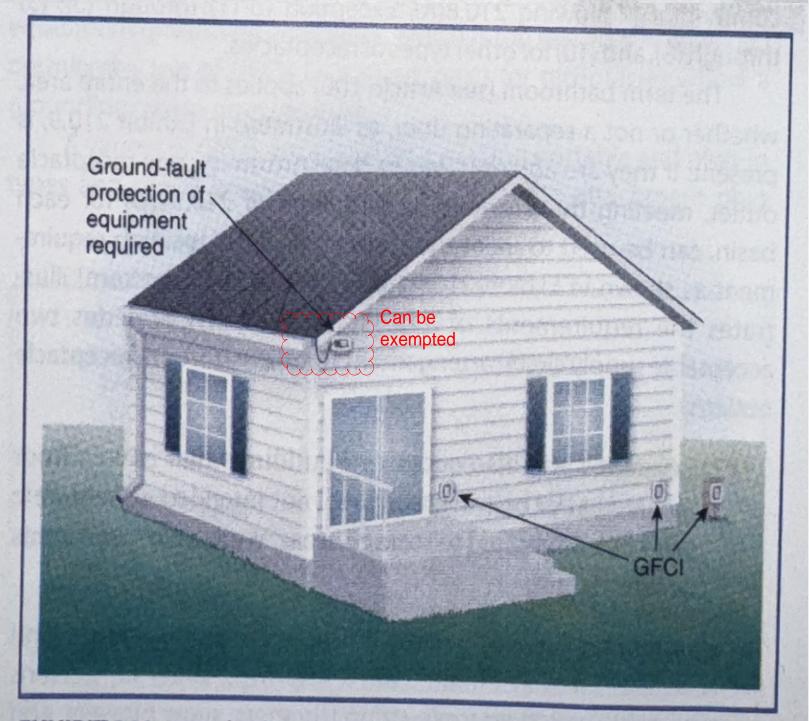
Exception to (3): Receptacles that are not readily accessible and are supplied by a branch circuit dedicated to electric snow-melting, deicing, or pipeline and vessel heating equipment shall be permitted to be installed in accordance with 426.28 or 427.22, as applicable.



**EXHIBIT 210.11** A dwelling unit with three outdoor receptacles that are required to have GFCI protection. It also has one outdoor receptacle that supplies rooftop snow melting equipment, which is protected by ground-fault protection of equipment (GFPE).