





# Meter mains, QO, CSED, ringed socket, 400A, surface mount, Class 320 manual bypass

CUM400CB

Product availability: Stock - Normally stocked in distribution facility

Product or Component Type	Meter Mains
Range of Product	QO

Complementary	
Line Rated Current	400 A
Short-circuit current	25 kA
Network number of phases	1
Meter socket type	Ringed
Mounting	Surface Semi flush field installed flange kit
Number of spaces	0
Number of circuits	0
Number of Tandem Breakers	0
Hub type	A-L
Electrical connection	Lugs service ground Studs line side
Wire Size	AWG 4250 kcmil aluminium)service ground AWG 4250 kcmil copper)service ground
Disconnect	Service disconnect (factory installed)
Main Breaker Rating	400 A
Branch Breaker Rating	200 A
Service feed location	UG
Bypass type	Manual bypass Class 320
Height	43.00 in (1092.20 mm)
Width	28.25 in (717.55 mm)
Depth	7.87 in (199.90 mm)

### **Environment**

**Product certifications** UL E-6294

## Ordering and shipping details

Category	00148-HOMELINE CSED DEVICES
Discount Schedule	DE3A
GTIN	785901539544
Returnability	No
Country of origin	MX

### **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	42.99 in (109.2 cm)
Package 1 Width	28.27 in (71.8 cm)
Package 1 Length	7.87 in (20 cm)
Package 1 Weight	115.00 lb(US) (52.163 kg)

### Offer Sustainability


Sustainable offer status	Green Premium product	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation	REACh Declaration	
EU RoHS Directive	Compliant EU RoHS Declaration	
Mercury free	Yes	
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.	
RoHS exemption information	Yes	
Environmental Disclosure	Product Environmental Profile	

### **Contractual warranty**

Warranty	18 months


**Technical Illustration** 

#### **Dimensions**

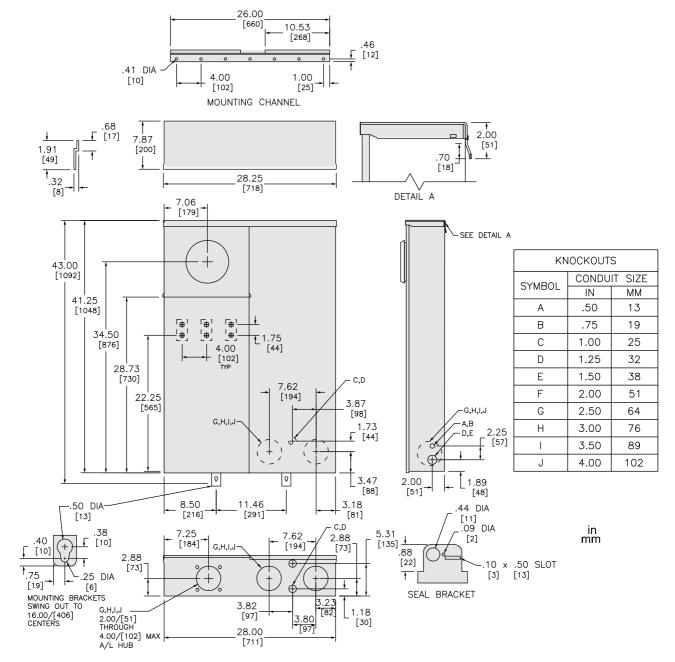

All dimensions are approximate. Also refer to technical documentation.

### Wiring Diagram

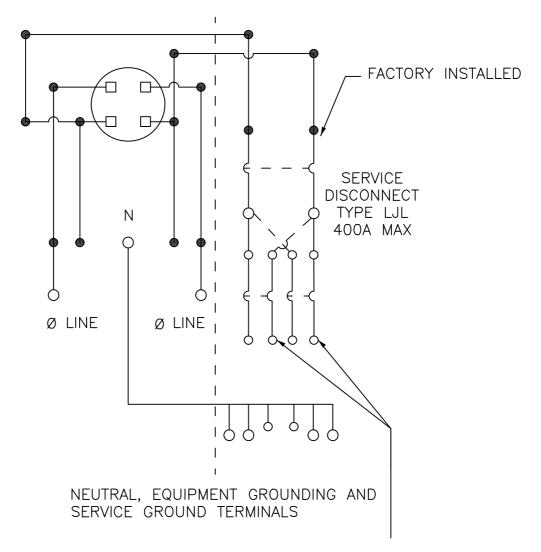

TWO BRANCH CIRCUIT BREAKERS TYPE Q2L (QBL, QDL OR QGL PREFIX) (200A MAX) MAY BE FIELD INSTALLED. ORDER ONE MOUNTING KIT CATALOG NUMBER BMK2Q400

### Recommended replacement(s)